


# Technical Specifications

## Mantels


MANTEL	PAGE	A	B	C	D	E	F	LD	R
ALDERLEY	13	52	43.5	35	35	47	7	4.5	1 to 3
ASHFORD	12	54	45.75	35	35	50	7.5	6.5	1
BAYSWATER	5	51	44	30.75	33	46	7.5	5.25	1 to 3
BELGRAVIA	31	52	44	36	36	52	6.5	6.5	1 to 3
BEXLEY	4	51	44	30.75	33	46	7.5	5.25	1 to 3
BROMLEY	13	54	43.75	33.5	34.5	48.5	7	4.5	1 to 3
CAMBERLEY	7	52	43	34	34	52	8.25	8.25	1 to 3
CAMDEN	31	52	43	34	34	52	7.5	7.5	1 to 3
CHELSEA	9	54	44.75	34	34	51.5	7.5	6.5	1 to 3
CHELSEA ARCH	10	54	44.75	34	34	51.5	7.5	6.5	1 to 3
CHESSINGTON	21	54	46	33	33	47.5	9	5.25	1 to 3
COATBRIDGE	8	52	42	32	32	48	7.5	5.25	1 to 3
CONSETT	41	47	43	33	36	47	6.5	6.5	1 to 3
CROYDON	19	54	44.5	36	36	48.5	7.5	5.25	1 to 3
CUMBERLAND	19	54	44.5	36	36	48.5	8.5	5.25	1 to 3
DIDSBURY	11	54	44.5	36	36	50	8.5	4.5	1 to 3
DISLEY	41	48	42.5	34	34.5	45.5	6.5	4.25	1 to 3
DORCHESTER	22	56	47.25	36	36	51	9	5.25	1 to 3
DURHAM	14	52	43	35.5	35	47	7	4.5	1 to 3
EARLSDON	30	54	44.75	34	34	52	6.5	5.25	1 to 3
ELGIN	35	54	45	36	36	51	7	4.5	1 to 3
GRANTHAM	29	54	45.75	36	36	52	6.5	5	1 to 3
GREENWICH	11	54	45	36	36	50	7.5	5.25	1 to 3
HARROGATE	38	55	47	36	36	52	7.5	5.25	1 to 3
HAVERSHAM	20	54	44	35	35	49	7.5	4.5	1 to 3
HENLEY	7	52	43	34	34	52	6.5	6.5	1 to 3
HIGHBURY	27	54	45	36	36	49	7.5	5.75	1 to 3
HUNTLY	37	56	47	36	36	53	7.5	5.25	1 to 3
ILFORD	29	54	46.5	36	36	52	7.5	5.75	1 to 3
KENSINGTON	9	55.5	43.5	35	35	50.5	10	6	1
KESWICK	26	55	47	36	36	52.5	7.5	5.5	1 to 3
KINGSLEY	39	54	44	36	36	48.5	9	5.75	1 to 3
LANCASHIRE	17	52	44.5	34	34	47.5	7	5.25	1 to 3
LEITH	36	54	45.5	36	36	51.5	7.5	5.25	1 to 3
MAYFAIR	25	56	46.75	36	36	53	9	6	1 to 3
OBAN	37	57	44.5	36	36	50.5	7.5	5.75	1 to 3
PENDLE	17	52	43	35	35	47.5	8	4.5	1 to 3
QUEENSBURY	35	57	47	36	36	52	7	4.5	1 to 3
ROMFORD	33	52	43.25	36	36	52	7.25	7.25	1 to 3
ROSS	33	52	44	36	36	50.5	7	6	1
ROTHBURY	15	48	43	34.5	33.5	45	7	4.5	1 to 3
RUTLAND	39	51	42.5	34	34	48	8	5.25	1 to 3
STONEHAVEN	40	54	45	36	35	50	7.5	5.25	1 to 3
SUTHERLAND	18	57	44.5	36	36	50.5	7.5	5.75	1 to 3
TIVERTON	15	48	40.5	32	32	45	9.25	7.5	1 to 3
ULLSWATER	16	54	43.5	36	35	51	7.5	6	1 to 3
UPMINSTER	5	51	44	30.75	33	46	7.5	5.25	1 to 3
UPTON	32	54	45.5	34	34.5	50	7.5	5.25	1 to 3
WARWICK	34	57	47	34.5	35	52	8.5	7.25	1 to 3
WESTMINSTER	24	54	48	36	36	51	7.5	5.25	1 to 3
WINCHESTER	23	56	45	35	36	50	10.5	5.75	1 to 3
WINDSOR	6	52	44	36	36	52	7	7	1 to 3
WOODCOTE	21	54	45	36	36	51	7.5	5	1 to 3
YATELEY	28	54	45	34	33	49.5	7.5	5.25	1 to 3
MANTEL	PAGE	A	B	C	D	E	F	LD	R

# Technical Specifications

## Mantel Measurement References

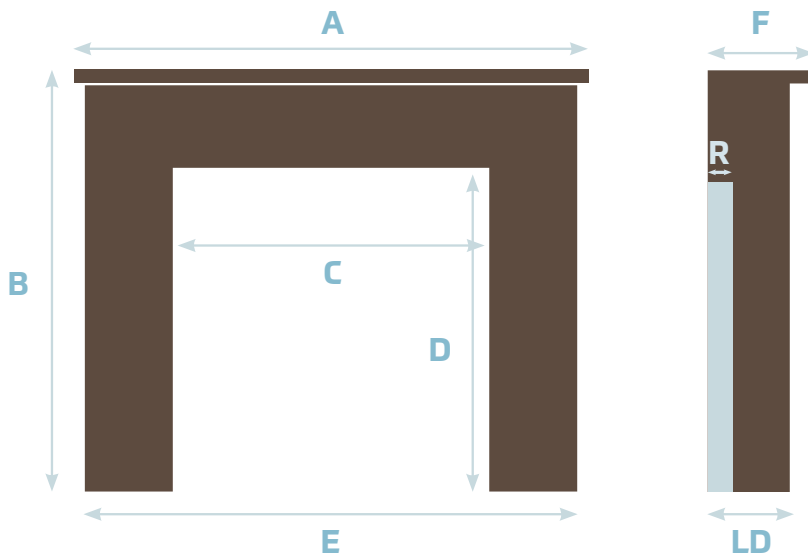

## Mirror Measurement References

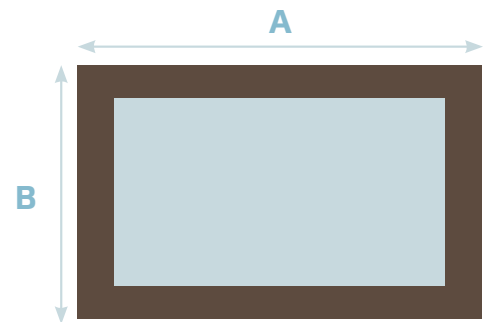

## Mirrors

MIRROR	PAGE	A	B
ALBANY	20	45.25	25.5
BERKELEY	4	47.25	28.5
BOSTON	30	45	27.5
CLEVELAND	8	48	28.25
DENVER	32	47	26.5
EDMONTON	16	45	27.5
HALIFAX	28	48	30
HAMILTON	36	50	29
JERSEY	23	50	27.5
KINGSTON	10	47	26.5
LANGLEY	26 & 27	50	28
NEWARK	14 & 42	45	27.5
PORTLAND	6 & 12	47	26.5
ROCHESTER	18	48	27.5
RIPON	38	50	30
STAMFORD	40	47.25	28.25
STOCKTON	34	49.5	29
WASHINGTON	24 & 25	50	28
WORCESTER	22	50	28
MIRROR	PAGE	W	H

## Lighting



Halogen Lights



Slimline LED's



Deluxe LED's

Downlights can completely transform the appearance of a fireplace. The soft warm glow of the lights completes the focal point in your room. All of our surrounds are available with the option of fully fitted downlights complete with plug and subtly placed switch. We offer 3 choices of downlights, which are shown in the adjacent images.

Halogen lights are low voltage with two 24v GU4 light bulbs encased in a chic chrome holder and are easily accessible should you need to change them.

LED Lights (Light-Emitting Diodes) are energy efficient and will last longer than a normal light bulb. Our Slimline LED lights are supplied with three bulbs which are 15mm in diameter and fit without a chrome holder to give more flexibility should rebate depth be an issue. Our Deluxe LED lights are also supplied with three bulbs, however, each one is encased in a stylishly attractive chrome holder.

## Important Mantel Information

- Under no circumstances should Oak Veneer mantels be installed with High Efficiency (HE) or Balanced Flue (BF) Gas Fires.
- When fitting surrounds with solid fuel applications, only Solid Oak or Pastel surrounds should be used and HETAS approved clearances must be adhered to.
- All standard fire surrounds will accommodate a 37" x 37" back panel.
- Our measurement "D" is quoted to the corner of the opening as shown in the technical diagram.
- All of our downlights are provided with 1.5m of cable and a 5 Amp plug. Removal of this plug will invalidate your warranty and may overload the transformer, causing the lights to fuse.